

AMERI-

CANATM

& CANADIANA

ROOFING AND SIDING PANELS



ideal roofing
Company Ltd. Manufacturers

SOLID STEEL STRENGTH



Canadian Supplier

AMERI-CANA™ PANEL

SUPERIOR STRENGTH AND VERSATILITY

Ideal Roofing's Ameri-Cana roofing and siding panel offers superior strength with its strong 80,000 psi full-hard steel core and its 5 specially-designed 3/4"-high ribs spaced every 9 inches. Superior strength means savings on wood or steel purlins for the builder. Please consult the following load tables.

"OUR RIBS ARE BETTER!"



The ribs on the Ameri-Cana panel are reinforced to better accommodate fasteners. With its symmetrical pattern and ribs with steeper angles, the Ameri-Cana panel is considered the ultimate roofing or siding panel for agricultural, commercial or industrial buildings as well as for residential roofing applications.



WEATHERTIGHT OVERLAP

Ideal Roofing's Ameri-Cana panel offers maximum protection against leakage with its built-in anti-siphon groove to counter water infiltration resulting from capillary action. This feature makes the Ameri-Cana panel "ideal" for use as a roofing sheet for long and low rafters with a roof pitch as low as 3/12.

UNIFORMLY DISTRIBUTED LOADS (LBS/FT²) FOR TRIPLE SPAN CONDITION

(Tested Under ASTM E72-05)

	18"	24"	30"	36"	42"	48"
29 gage (0.014")	304	171	95	67	49	38
26 gage (0.017")	423	237	135	87	63	48




4 COATS OF PROTECTION FOR LONGER LIFE

- 1** ZINC COAT (GALV G-90)
- 2** ZINC PHOSPHATE TREATMENT
- 3** PRIMER COAT
- 4** PERSPECTRA SERIES™ / WEATHERX™

40 YEAR LIMITED WARRANTY

YOUR CHOICE OF MATERIAL *Applied only to the Ameri-Cana

Colorsteel Steel (G90 Finish)	Colorsteel Plus (G90 Finish)	Prefinished Galvalume Steel	Aluminum Durable Extruded
K076-4001 05 Gehr 95, 2075 (0-95) Gauge: 29 (0.014" Thick) and 26 (0.017" Thick)	K076-4700 05 Gehr 95, 4075 Gauge: 29 (0.014" Thick)	Perspectra Series™ / WeatherX™ see color chart K076-4001 05 Gehr 95, 2075 (0-95) Gauge: 29 (0.014" Thick) and 26 (0.017" Thick)	Gauge: 29 (0.014" Thick)

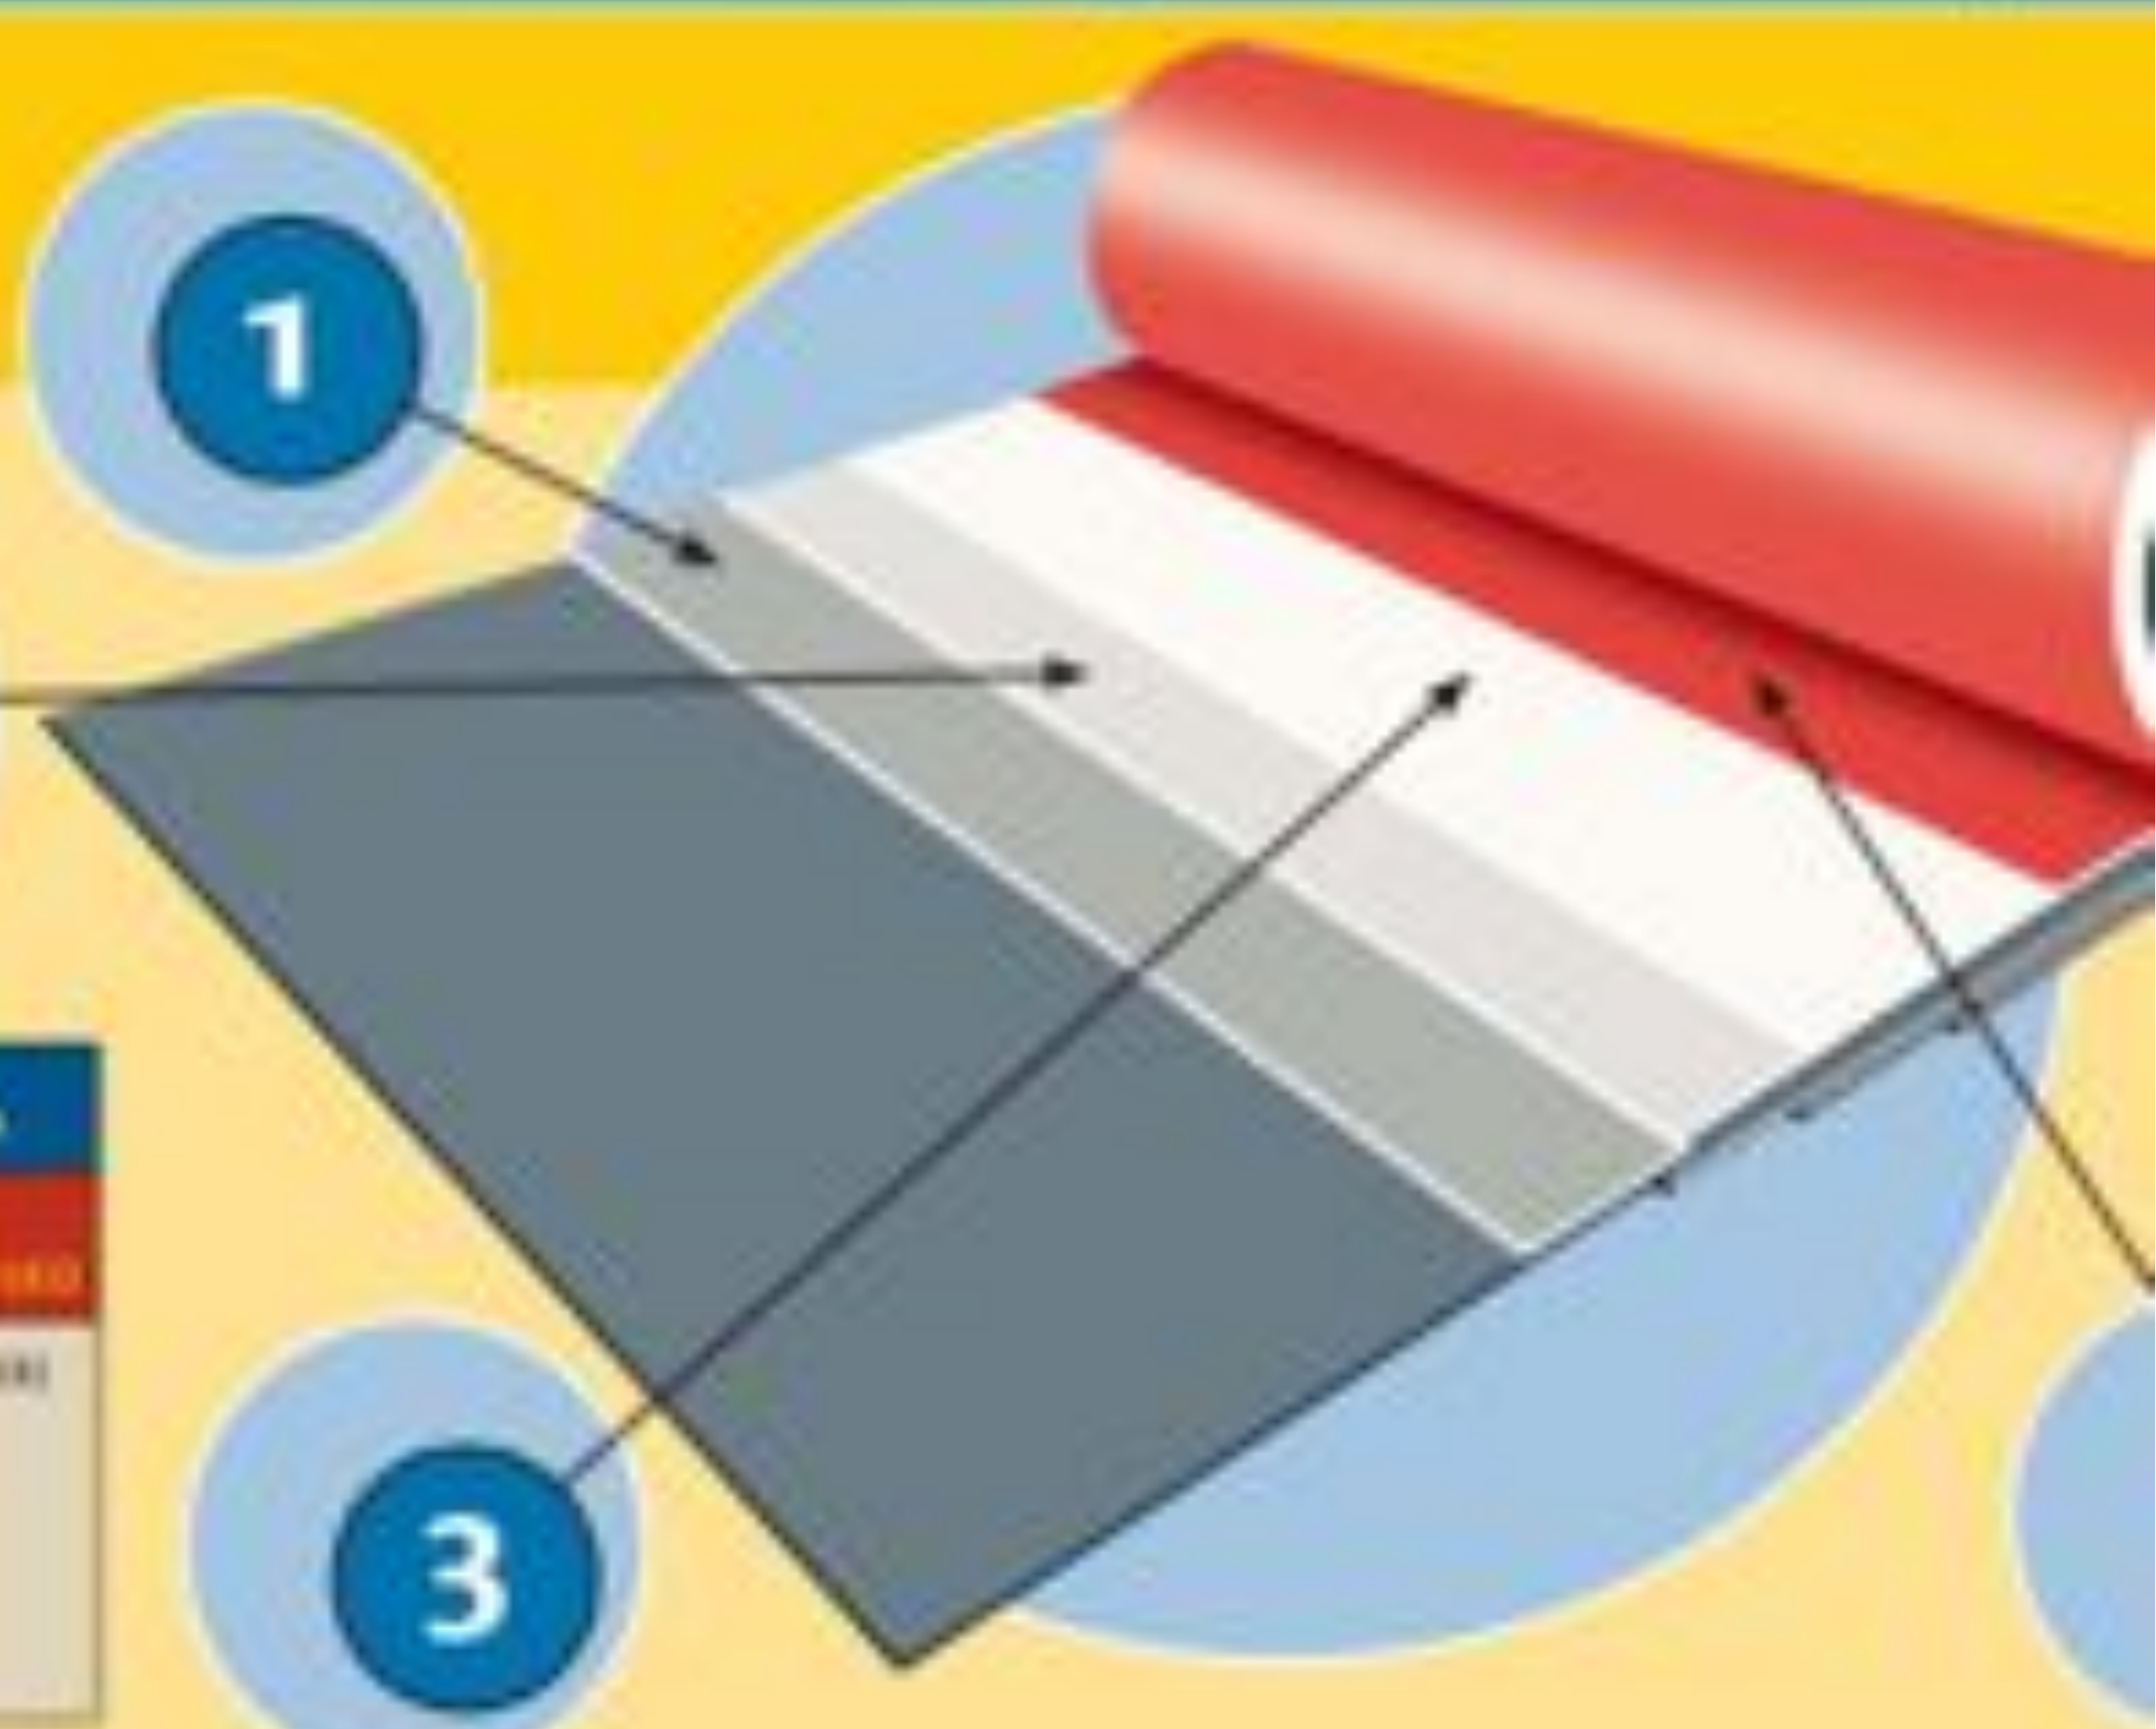

CANADIANA SIDING PANEL


SUPERIOR STRENGTH STEEL SIDING

The Canadiana panel is destined to become the industry's most versatile lightweight steel siding panel with its strong full-hard steel core (80,000 psi) and its seven 5/8"-high ribs spaced every 6 inches.



"...COVERS A WIDER AREA"

Economically formed from a 41-in.-wide steel coil to a final 36-in. ribbed sheet, this panel covers a wider area than other siding panels. Consider the aesthetic and structural qualities of our Canadiana steel siding panel for exterior and interior use on agricultural, commercial and industrial buildings.

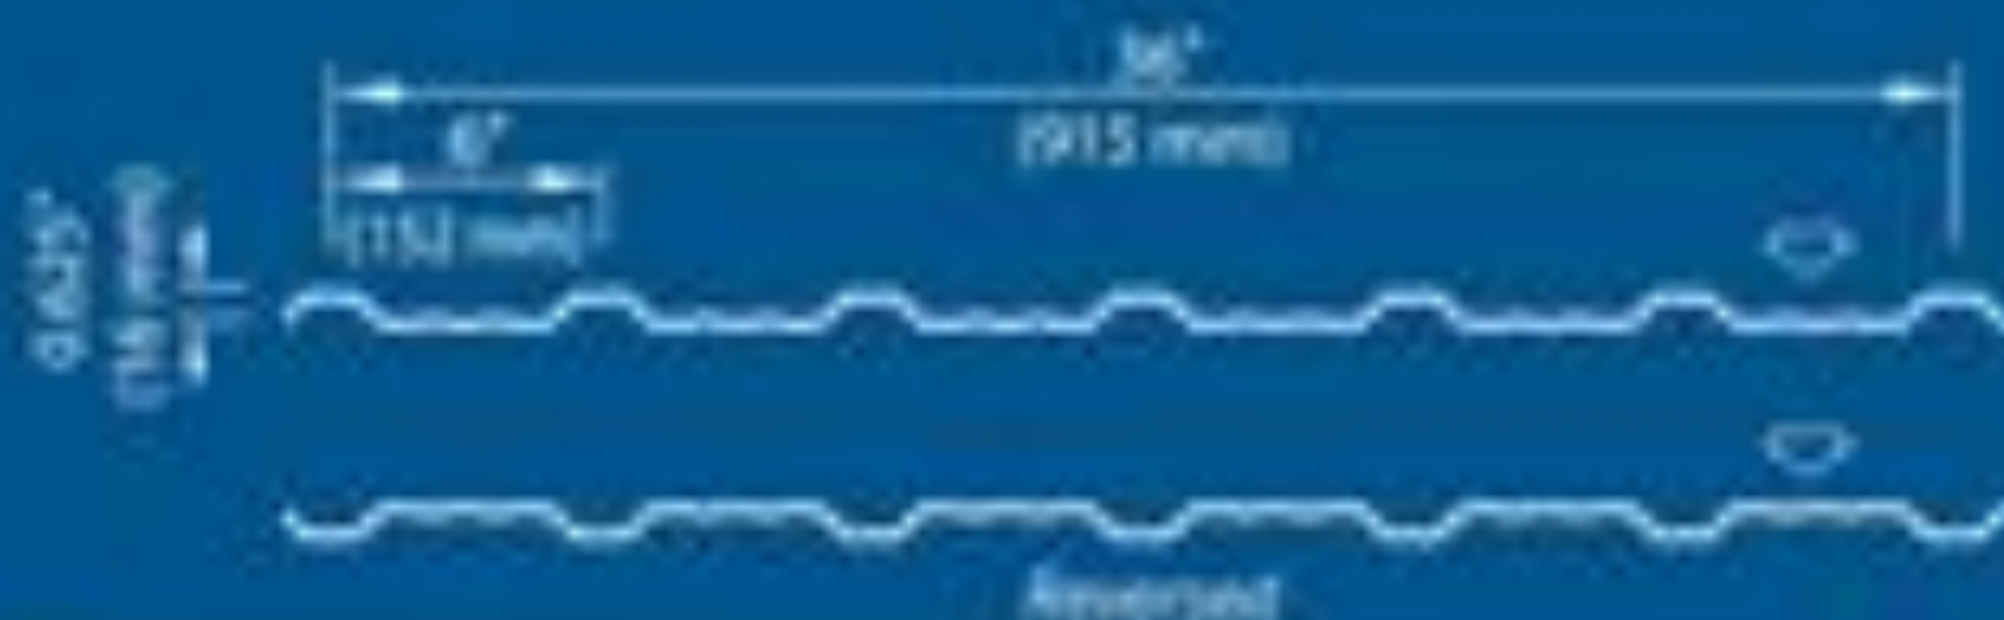

UNIFORMLY DISTRIBUTED LOADS (LBS/FT²) FOR TRIPLE SPAN CONDITION

(Theoretical Data)

	18"	24"	30"	36"	42"	48"
20 gage (0.0187")	213	120	77	53	36	24
26 gage (0.0217")	321	180	115	80	51	34

Normal Occupancy

	18"	24"	30"	36"	42"	48"
20 gage (0.0187")	266	150	97	66	45	30
26 gage (0.0217")	401	225	144	100	64	43

Low Human Occupancy (Farm Buildings)



20 ATTRACTIVE COLOURS TO ENHANCE YOUR BUILDINGS

Colours not exactly as shown. See colour card.

Dark Brown - ID 8127	Tile Red - ID 8129	Burgundy - ID 8111	Polar White - ID 8181
Morris Blue - ID 8133	White - ID 8117	Bone White - ID 8171	Antique Linen - ID 8196
Taupe - ID 8115	Stone Grey - ID 8106	Regent Grey - ID 8130	Bright Red - ID 8186
Red - ID 8136	State Blue - ID 8160	Royal Blue - ID 8170	Medium Green - ID 8124
Forest Green - ID 8107	Charcoal - ID 8108	Coffee - ID 8128	Black - ID 8142

TIME AND MONEY SAVERS

Both the Ameri-Cana and Canadiana panels save you time and money! Time because you install wider sheets covering 36-inches that are custom-cut to the inch in lengths measuring up to 40 feet, for your convenience. You save money because the Ameri-Cana and Canadiana panels are made from a 41-in.-wide flat steel sheet with considerably less metal waste than any other high-rib profile.

FLASHINGS, TRIMS, FASTENERS AND ACCESSORIES



Steel Gable	Ridge Roll, 10' lengths	Valley, 18', 24', 30'	Chimney Strip	Ridge Vent, 10' lengths	Fitted Ridge Cap, 5' or 8' lengths	Roll Valley Caps, 10' lengths	END CAPS
Fitted Wall Flashing	1/2" Bar	1/2" Channel	Drainage Bar	Touch up paint	Screws with neoprene washer	#14 Self-drilling screws with 3/16" nylon head	#12 #14 Self-drilling screws with neoprene washer

To add the finishing touch, Ideal Roofing fabricates all its flashing and trims in all colours and materials.

UL 580 (Class 5), Wind Uplift Resistance (check our website for installation details).